

### ABOUT TIMES-7

Pushing the boundaries of RFID technology worldwide Times-7 are leaders in RFID antenna design and manufacture. Our patented award winning UHF antennas meet the needs of virtually any industry application; providing customers with fast accurate tracking of products, assets & people; empowering organisations to transform processes & reduce costs.

Our comprehensive range of antennas are unique in the RFID industry; offering high levels of performance & durability in an aesthetically superior form. Proven in a diverse & growing range of markets, applications include: retail & customer interaction, conference & people tracking, race timing, baggage handling, and logistic & supply chain asset management.



Just 14mm / 0.55 in. thick

High performance & ultra-rugged

Impact Strengthened

All weather / outdoors

With 5dBic performance in a sleek yet ultra-rugged and compact 210x155mm (8" x 6") dimension, the A3010 is ideal for Forklift RFID and proven in applications from waste management to access control. Impact strengthened, the RuggedLine IP67 range is rated for 24/7 outdoors and all weather use. Available in a flush or rack mount configuration, Times-7's RuggedLine antennas are setting a new benchmark for high performance RFID in demanding/industrial applications.

## Specifications

### Physical / Environmental Specifications

Dimensions (LxWxD):	210 mm x 155 mm x 14 mm 8.3 in. x 6.1 in. x 0.55 in.
Weight:	0.75kg (1.6 lbs)
Radome Material:	PVC
Environmental Rating:	IP 67
Operating / Storage Temperature:	-20° to +55°C / -30° to +65°C -4° to +131°F / -22° to +149°F
Mounting:	Flush mount standard, rack mount accessory available
Connector type / position:	2m (6ft) lead RP-TNC connector



### Electrical Specifications

Frequency Range:	864 – 869 MHz / 902 – 928 MHz
Polarisation:	Circular
Far-field Gain:	5dBic Peak
Far-field 3dB beamwidth:	XZ = 70° YZ = 90°
Typical VSWR across frequency range:	< 1.4 across the band
Front to back ratio:	-13dB
Axial ratio:	<2.5dB Typical
Nominal Impedance:	50 Ω
Anti-static protection:	Yes
Maximum Input Power:	6 W

E-field elevation & Azimuth Patterns

XZ Plane

YZ Plane

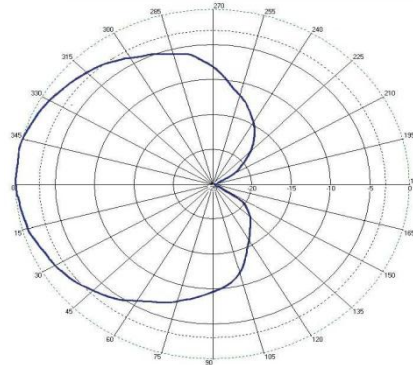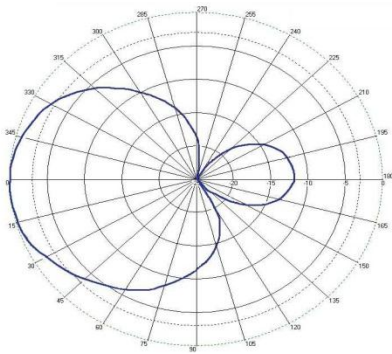

Vertical

Horizontal

**Ordering Information (please quote both product code & part no.)**

Product Code	Band	Part No.
A3010	902-928 FCC	71655
A3010	864-869 ETSI	71658
Rack Mount Accessory		71757

## Applications

- Warehousing
- Access Control / Vehicle Tolling
- Waste management



The technical data contained in this publication is not a guarantee for which Times-7 Research Ltd assumes legal accountability. It is indicative of typical performance, and if required should be relied on for specific applications only after due verification.

All technical data, specifications and other information contained herein are deemed to be the proprietary intellectual property of Times-7 Research Ltd. No reproduction, copy or use thereof may be made without the express written consent of Times-7 Research Ltd.

**OUR GLOBAL NETWORK**

Constantly increasing market reach and influence in the global RFID industry, Times-7's international support spans The Americas, Europe, and Asia Pacific regions through our distributor, authorized reseller and integrated solutions provider network.

Times-7 Research Ltd  
29 Railway Avenue  
Lower Hutt 5010  
New Zealand  
P: +64 4 569 1500  
F: +64 4 569 1400

APAC  
P: +64 4 974 6566

NORTH AMERICA  
P: +1 858 225 2214

EMEA  
P: +31 411 62 29 49

E: [info@times-7.com](mailto:info@times-7.com)

[www.times-7.com](http://www.times-7.com)