

HT 3915 is a miniature UHF tag for IT asset or other indoor assets tracking and management. Though the tag is optimized for metallic objects, it also performs well on non-metallic objects. A Slot in the tag body makes it possible to fix or hang on rounded pipes, cables or other objects where tag fixing using adhesive is not feasible.

TYPICAL APPLICATIONS

Metal surfaces and other materials

- IT and office assets
- Hospital assets
- Hotel assets
- Tools tracking

PHYSICAL SPECIFICATION

Tag Material	Engineering plastic, Synthetic face film
Tag Dimensions	39.0 x 15.0 x 4.0 mm
Weight	2.3 g
Delivery format	Single
Background Adhesive	High performance acrylic adhesive

RF SPECIFICATION


Mode of Operation	Passive
Device type	Class 1 Gen 2 Passive UHF RFID transponder
Air interface protocol	EPC Global Class 1 Gen 2 ISO 18000-6C
Operational frequency	FCC : 902-928 MHz ETSI : 865-869 MHz
IC type*	NXP UCODE 8
Memory configuration	EPC Size 96 - 128 Bits
Write cycle endurance	100,000
Data Retention	upto 20 years
Read range (2W ERP)**	FCC : On Metal 7 m, On Plastic 2 m, On Wood 2.3 m ETSI : On Metal 6 m, On Plastic 2.2 m, On Wood 2.3 m
Applicable surface materials	All Surface

ENVIRONMENTAL RESISTANCE

Operating Temperature	-20°C to +70°C / -4°F to +158°F
Withstands Exposure To	-40°C to +80°C / -40°F to +176°F
Peak Temperature	+80°C / +176°F
Adhesive Service Temperature	-40°C to +115°C / -40°F to +240°F
Recommended Application Temperature	+10°C to 38°C / +50°F to +100.4°F
Chemical Resistance	No physical or performance changes in: - 168 h Salt water (salinity 10%) exposure - 168 h Motor oil exposure - 12 h NaOH (10%) exposure - 30 min Acetone exposure
Water Resistance	IP68, Tested 5 hours in 1.5m deep water
Ideal Storage Condition	+23°C / +73.4°F, 50% RH
Expected Lifetime	Years in normal operating conditions

PRODUCT INSTALLATION

Attach the tag in close proximity to edge of metal for optimum read range performance, as shown in the image below.

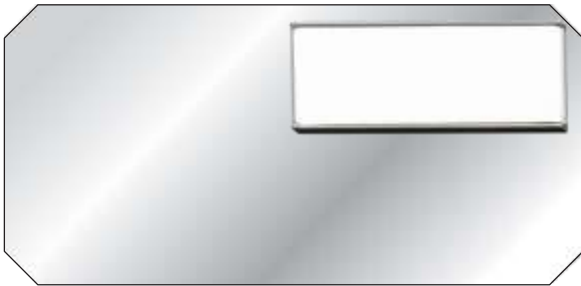

The tag can be attached to the surface using the following fixing methods

- **Adhesive:**
The tag is delivered with an adhesive tape attached. While mounting the tag ensure clean and dry surface to achieve maximum bond strength.
Ideal application temperature is from +10°C to 38°C / +50°F to +100.4°F and installation beyond this temperature range is not recommended.
Bond strength can be improved by applying pressure firmly while mounting the tag.
- **Cable Tie:**
Metallic or plastic cable ties can also be used to mount the tag onto the surface.

PERSONALIZATION OPTIONS

Pre-encoding

- Customer specific encoding of EPC

Customized Laser Engraving

- Customer specific layout including logo, text, and numbers.

ORDER INFORMATION




Part Number

- RF.HT.3915.ETSI
- RF.HT.3915.FCC


No. of Pieces

- 250 per box.

RADIATION PATTERN & READ RANGE GRAPH

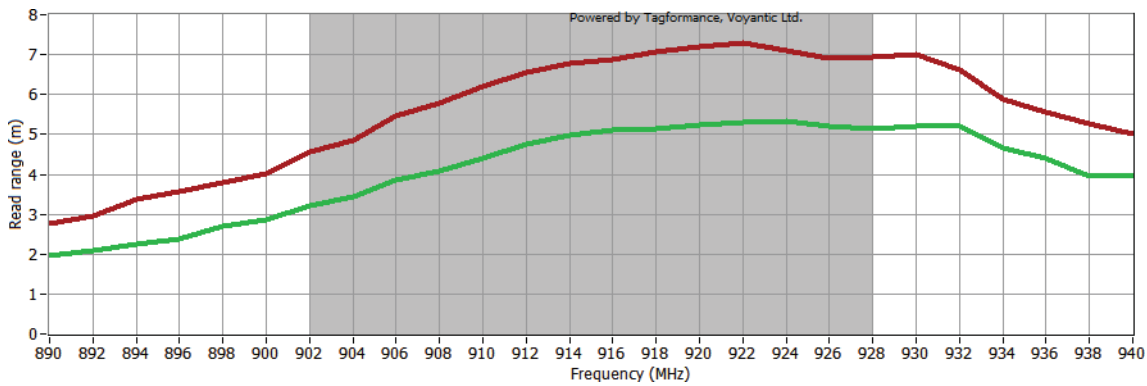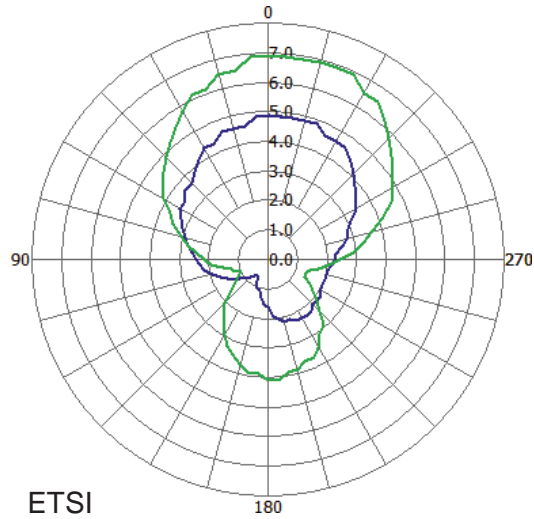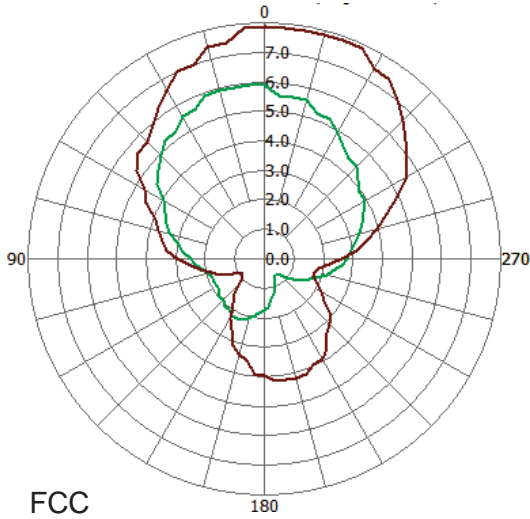

FCC ■ On the edge of metal plane ■ At the center of metal plane

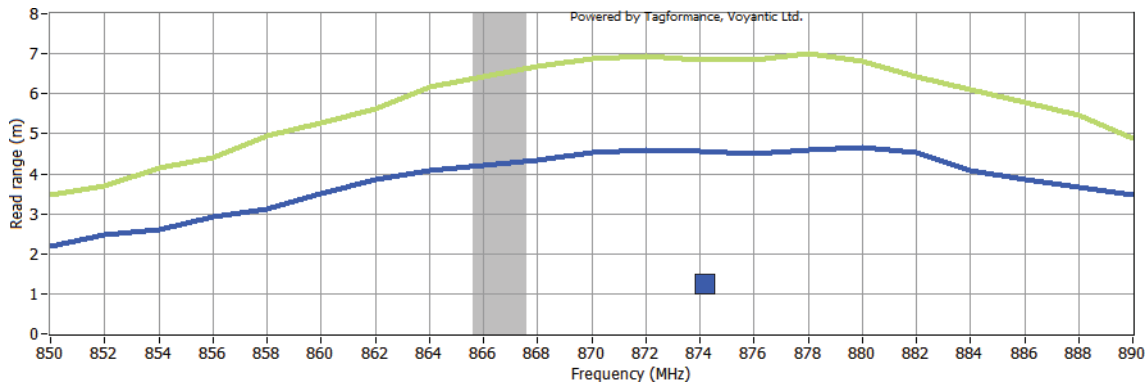

ETSI ■ On the edge of metal plane ■ At the center of metal plane

* Other IC's available on request

** The indicated read range values are measured in our laboratory testing environment, where antennas with optimum directivity are used with maximum allowed operating power. Different surface materials and environments may exhibit different results.



Version : 210420.01



For more information, visit: www.rfidcanada.com

Email: info@rfidcanada.com

+1 905-513-8919